




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	100 VAC to 120 VAC for 115V Type 200 VAC to 240 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Impedance Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	590 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

售價: 100 元


DIMENSION

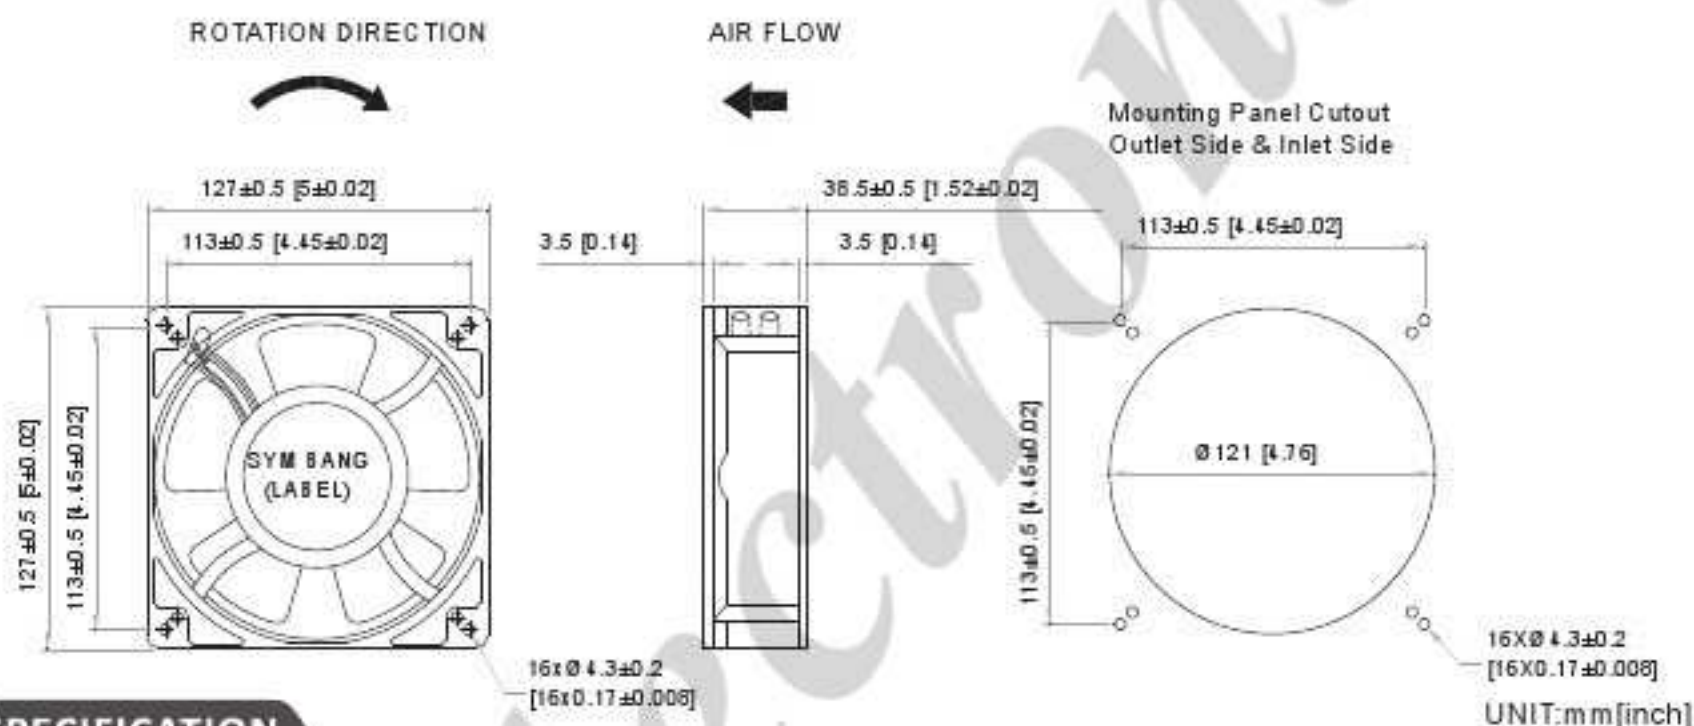

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A12738V1H	115	50/60	0.35/0.29	25.2/21.4	2700/3000	0.29/0.34	7.4/8.5	104/116	3.0/3.3	50/53
A12738V2H	230	50/60	0.20/0.16	27.8/22.6	2700/3000	0.29/0.34	7.4/8.5	104/116	3.0/3.3	50/53

AIR PERFORMANCE

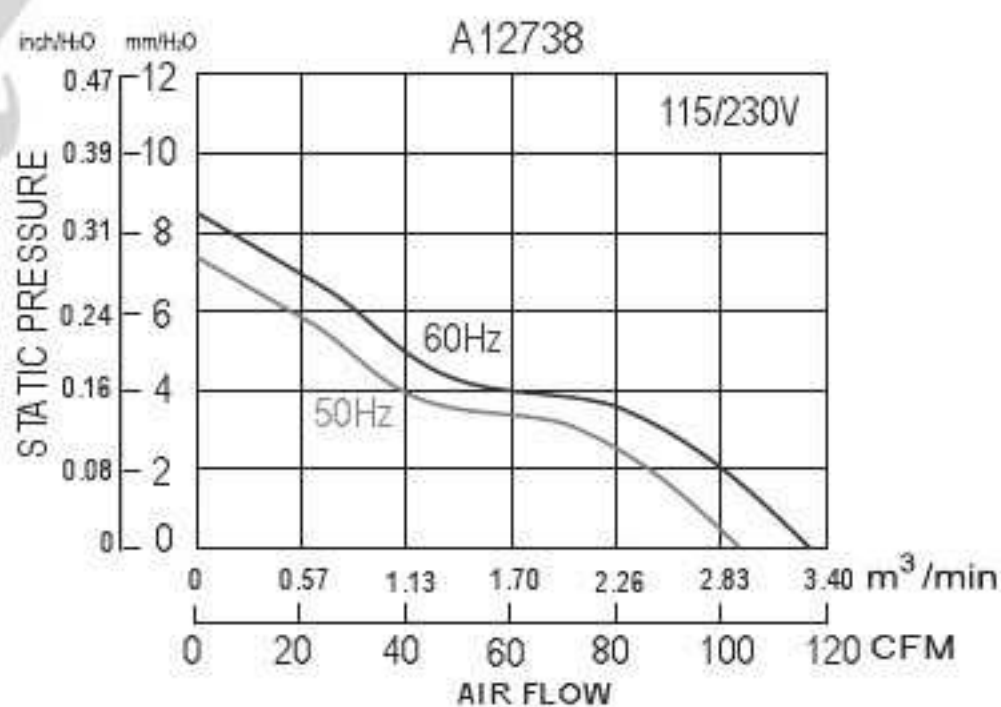

A12738M-B



127x127x38mm
(5"x5"x1.5")




HOUSING
IMPELLER
BEARING
MOTOR TYPE
TERMINATION
OPERATING VOLTAGE RANGE

DIELECTRIC STRENGTH
INSULATION
INSULATION RESISTANCE
OPERATING TEMPERATURE
SAFETY
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Iron Leaf
Ball
Outer Rotor, Shaded Pole Motor
Terminal or Lead Wires
100VAC to 125VAC for 110V Type
200VAC to 240VAC for 220V Type
1,500VAC for 1 minute
Class A
10M Ohms Min. @500 VDC
-10°C to +105°C
Impedance Protected
650g
Yes

DIMENSION

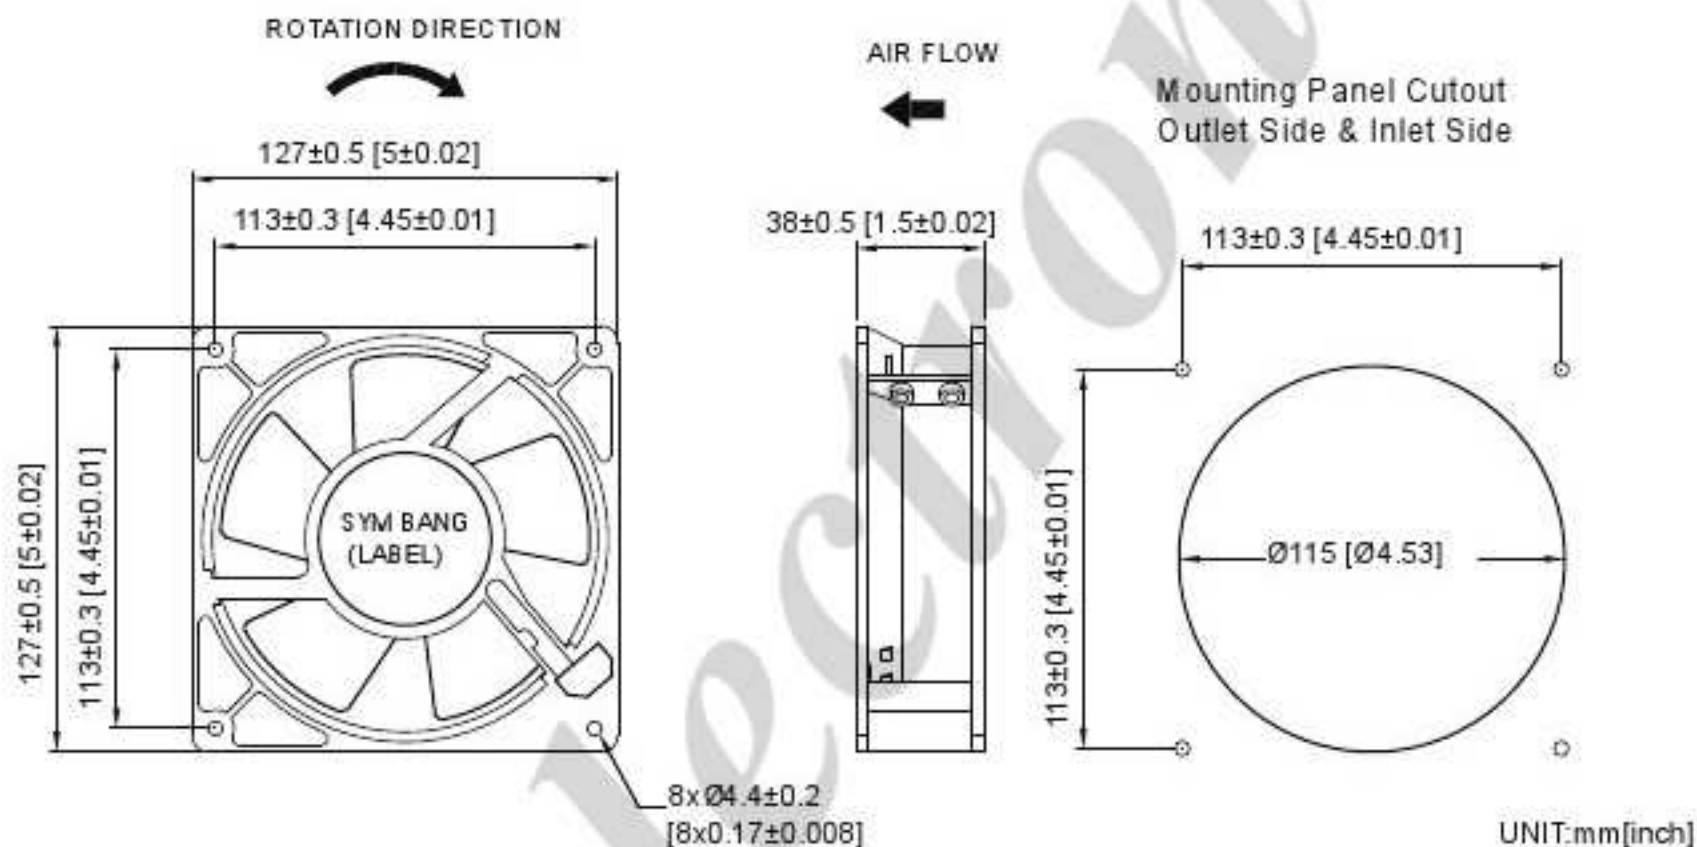

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @ 1M
A12738V1HM-B	110	50/60	0.28	27	2600/3000	0.28/0.32 7.2/8.1	120/134 3.4/3.8	50/55
A12738V1MM-B	110	50/60	0.26	25	2000/2200	0.22/0.28 5.5/7.0	94/105 2.7/2.9	41/45
A12738V2HM-B	220	50/60	0.16	25	2600/3000	0.28/0.32 7.2/8.1	120/134 3.4/3.8	50/55
A12738V2MM-B	220	50/60	0.15	23	2000/2200	0.22/0.28 5.2/7.0	94/105 2.7/2.9	41/45

AIR PERFORMANCE

