

A28089

280x280x89mm
(11.02"x11.02"x3.5")




HOUSING
IMPELLER
BEARING
MOTOR TYPE
TERMINATION
OPERATING VOLTAGE RANGE

DIELECTRIC STRENGTH
INSULATION
INSULATION RESISTANCE
OPERATING TEMPERATURE
SAFETY
WEIGHT
ROHS COMPLIANCE

Aluminum Die Casting, Painted Black
Thermoplastic PBT, UL94V-0
Ball
AC Induction Capacitor Motor
Terminals or Lead Wire
85VAC to 125VAC for 115V Type
185VAC to 245VAC for 230V Type
1,500 VAC for 1 minute
Class A
10M Ohms min. @ 500VDC
-10°C to +70°C
Thermally Protected
3850g
Yes

AC Fans & Blowers

DIMENSION

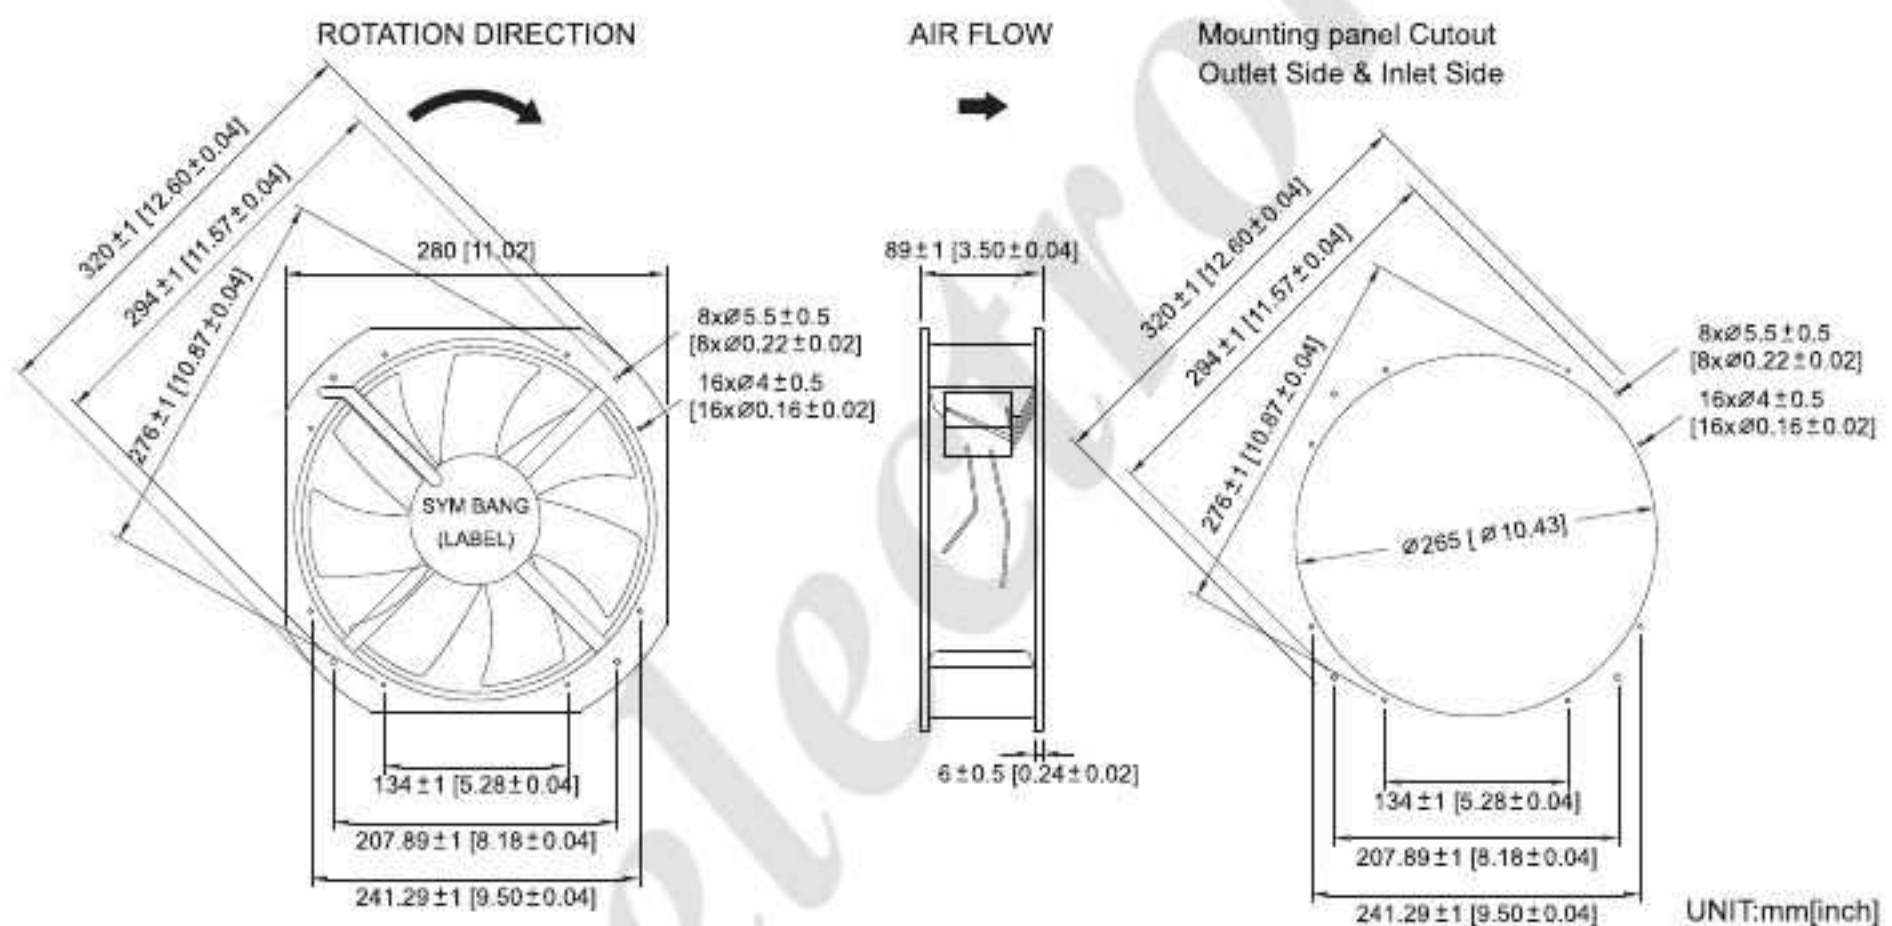

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
A28089V1H	115	50/60	1.8 / 2.5	196/273	2800/3250	1.24/1.06 31.59/26.84	1320/1450 37.35/41.03	70/74
A28089V2H	230	50/60	0.7 / 1.1	175/258	2800/3200	1.24/1.06 31.59/26.84	1320/1450 37.35/41.03	70/74
A28089V4H	480	60	0.58	275	3250	1.06 26.84	1450 41.03	74

AIR PERFORMANCE

